


RESIDENTIAL LOCAL STREET

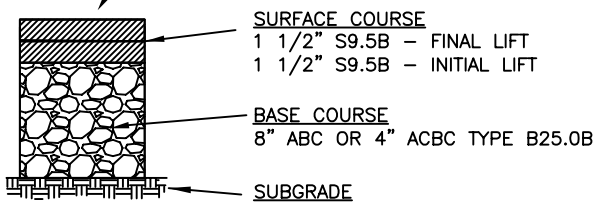

TYPICAL PAVEMENT SECTION

NOTES:

1. SIDEWALK SHALL BE PROVIDED ON BOTH SIDES OF THE STREET.
2. SEE SECTION II. B. FOR ADDITIONAL DESIGN CRITERIA.
3. REFER TO STANDARD DRAWING 285.1 FOR PARALLEL PARKING LAYOUT.

KEY

- (R) 2'-6" STD. CURB AND GUTTER
- (S) 4" CONCRETE SIDEWALK

NOT TO SCALE

REV. DATE
10/01/15
STD. NO.
200.1