


2:1 CUT MAX.
3:1 FILL MAX.

2:1 CUT MAX.
3:1 FILL MAX.

RESIDENTIAL LOCAL STREET

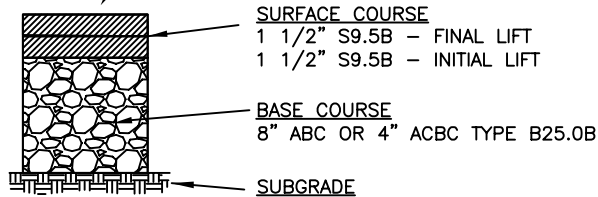

TYPICAL PAVEMENT SECTION

KEY

- (R) 2'-6" STD. CURB AND GUTTER
- (S) 4" CONCRETE SIDEWALK

NOTES:

1. SIDEWALK SHALL BE PROVIDED ON BOTH SIDES OF THE STREET.
2. SEE SECTION II. B. FOR ADDITIONAL DESIGN CRITERIA.
3. 2'-0" VALLEY GUTTER MAY BE SUBSTITUTED FOR 2'-6" CURB AND GUTTER ON THE SIDE OF THE STREET WITHOUT PARALLEL PARKING. THIS REDUCES THE MINIMUM RIGHT-OF-WAY BY SIX INCHES. 2'-0" VALLEY GUTTER MAY NOT BE SUBSTITUTED FOR 2'-6" CURB AND GUTTER ON THE SIDE OF THE STREET WITH PARALLEL PARKING.
4. REFER TO STANDARD DRAWING 285.1 FOR PARALLEL PARKING LAYOUT.

NOT TO SCALE

REV. DATE
10/01/15
STD. NO.
200.2