


**RESIDENTIAL DIVIDED COLLECTOR STREET**  
(TWO LANE SECTION)

**NOTES:**

1. CURB RETURN RADIUS DIMENSIONS AT INTERSECTIONS MAY VARY DEPENDING ON MEDIAN WIDTH AND WILL BE APPROVED ON A CASE BY CASE BASIS.
2. SUBDRAINS ARE REQUIRED ON ALL MEDIANS. (TO BE TIED INTO STORM DRAINAGE SYSTEM.) REFER TO SUBDRAIN STANDARD DETAIL 312.1.
3. MEDIAN PLANTINGS SHALL NOT OBSTRUCT INTERSECTION SIGHT DISTANCE REQUIREMENTS.
4. TEN (10) FOOT WIDE MEDIANS CAN ACCOMMODATE SMALL MATURING TREES. TWENTY (20) FOOT WIDE MEDIAN IS REQUIRED FOR LARGE MATURING TREES.
5. MONOLITHIC CONCRETE MEDIANS WITH BEVELED EDGES AND A MINIMUM WIDTH OF 6 FEET CAN BE USED IN LIEU OF LANDSCAPED MEDIANS.
6. BIKE LANE TO BE STRIPED.
7. SEE SECTION II. B. FOR ADDITIONAL DESIGN CRITERIA.

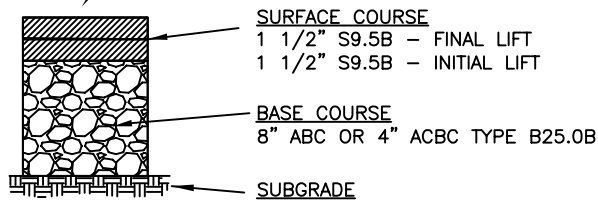

TYPICAL PAVEMENT SECTION

**KEY**

- (R) 2'-6" STANDARD CURB AND GUTTER
- (S) 4" CONCRETE SIDEWALK
- (T) 1'-6" MEDIAN CURB AND GUTTER

NOT TO SCALE

<b>REV. DATE</b>
10/01/15
<b>STD. NO.</b>
210.3