


RETAIL/MIXED USE LOCAL STREET

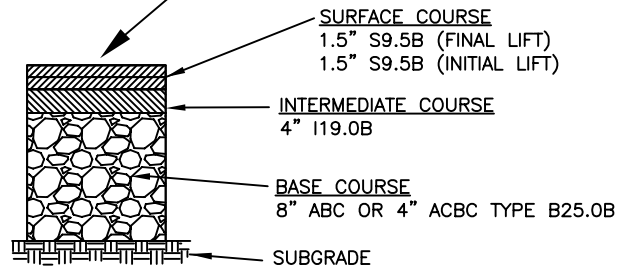

TYPICAL PAVEMENT SECTION

KEY

- Ⓡ 2'-6" STD. CURB AND GUTTER
- Ⓢ 4" CONCRETE SIDEWALK

NOTES:

1. SIDEWALK SHALL BE PROVIDED ON BOTH SIDES OF THE STREET.
2. SEE SECTION II. B. FOR ADDITIONAL DESIGN CRITERIA.
3. REFER TO STANDARD DRAWINGS 602.1 - 605.1 REGARDING SIDEWALK AROUND TREE GRATES. TREE GRATES SHALL BE PROVIDED WHEN TREES ARE LOCATED IN THE GREEN ZONE.
4. BASE COURSE TO EXTEND SIX INCHES BEYOND BACK OF CURB THEN TAPER OUT AT A FORTY-FIVE DEGREE ANGLE.
5. DRAWING TO BE USED IN CONJUNCTION WITH STANDARD 220.1 AND 285.1.

NOT TO SCALE

REV. DATE
10/01/15
STD. NO.
220.2