


REFER TO NOTES FOR ADDITIONAL CRITERIA

RETAIL/MIXED USE LOCAL STREET
(TWO LANE SECTION)

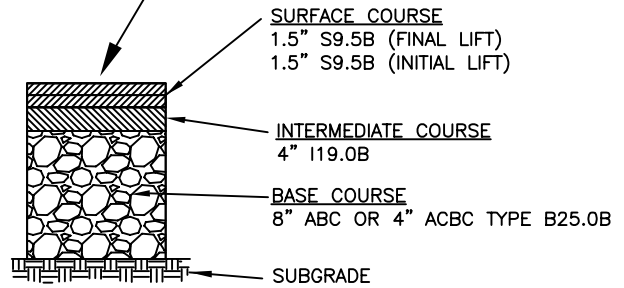

TYPICAL PAVEMENT SECTION

NOTES:

1. SIDEWALK SHALL BE PROVIDED ON BOTH SIDES OF THE STREET.
2. SEE SECTION II. B. FOR ADDITIONAL DESIGN CRITERIA.
3. REFER TO STANDARD DRAWINGS 602.1 – 605.1 REGARDING SIDEWALK AROUND TREE GRATES. TREE GRATES SHALL BE PROVIDED WHEN TREES ARE LOCATED IN THE GREEN ZONE.
4. FOR MEDIAN DIVIDED FACILITIES, A MINIMUM SIXTEEN (16) FOOT WIDE MEDIAN WITH ONE FOOT SIX INCH CURB AND GUTTER IS NEEDED. WHERE A LEFT-TURN LANE IS NOT INSTALLED, THE MEDIAN SHALL BE LANDSCAPED.
5. BASE COURSE TO EXTEND SIX INCHES BEYOND BACK OF CURB THEN TAPER OUT AT A FORTY-FIVE DEGREE ANGLE.
6. REFER TO STANDARD DRAWING 285.1 FOR PARALLEL PARKING LAYOUT.

KEY

- (R) 2'-6" STANDARD CURB AND GUTTER
- (S) 4" CONCRETE SIDEWALK
- (T) 1'-6" MEDIAN CURB AND GUTTER

NOT TO SCALE

REV. DATE
10/01/15
STD. NO.
220.3